



HANDLINE NOZZLES

FLEX ATTACK™

HANDLINE NOZZLES


1-3

Flex Attack™

A nozzle that lets you go from CAF to H₂O with a click of the tip. From the wet CAF attack setting, click left for a big open waterway and dry foam or click right for a tight $\frac{15}{16}$ " water only smooth bore. The patented, unobstructed variable orifice waterway won't strip CAF bubbles.

Features include:

- Free swivel inlet
- Hard anodized, Teflon® impregnated aluminum alloy body and pistol grip
- Aluminum/bronze shut-off handle
- Zytel® ST801 polyamide center barrel
- Ultra high molecular weight polyethylene shut-off seats
- 70A urethane compressible bore
- 184 GPM at 50 psi in water setting
- Maximum operating pressure 200 psi

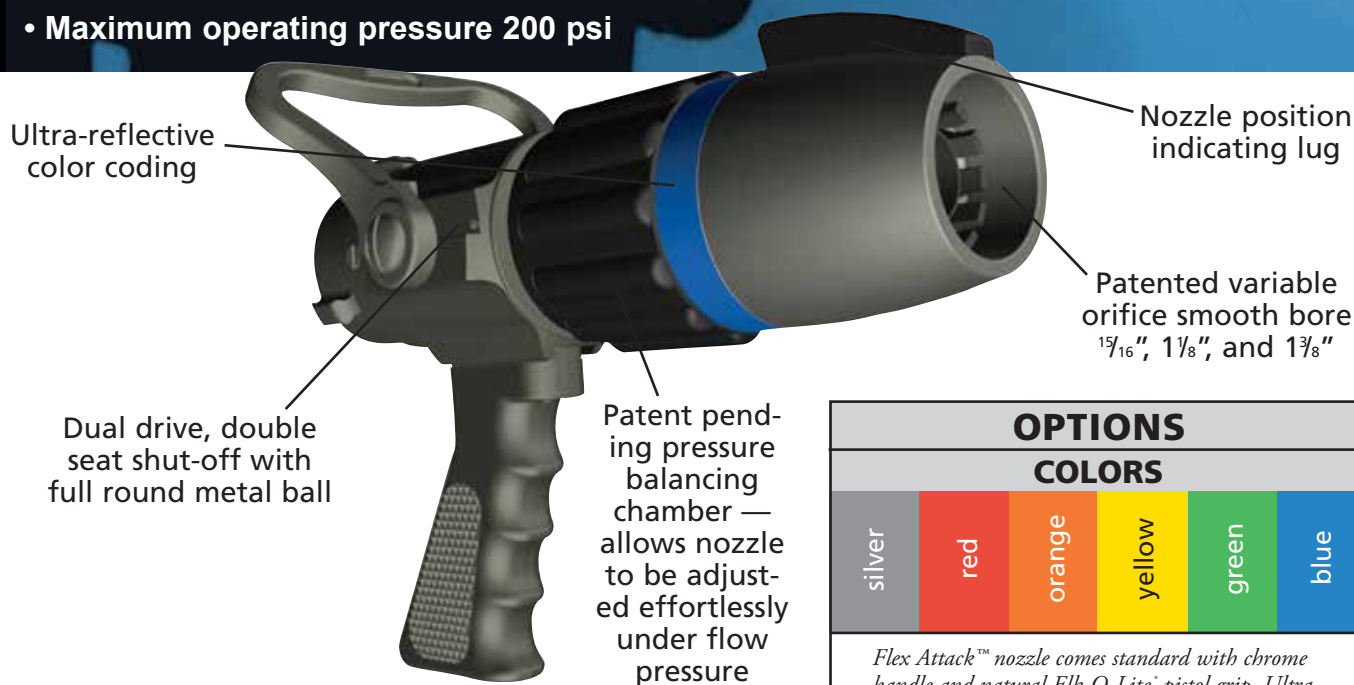

OPTIONS

COLORS



Flex Attack™ nozzle comes standard with chrome handle and natural Elk-O-Lite® pistol grip. Ultra-reflective, durable vinyl color coding bands are supplied with each nozzle. See above for colors.

HANDLES

TAB



HORSESHOE



THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.

British Standard Parallel Pipe (BSPP) and British Instantaneous (BS336) base options available.

BASE SIZE	FLOW RATE*	PRESSURE*	GRIP	HANDLE		MODEL
	GPM (LPM)			Tab	Horseshoe	
1.5"	184 (697)	50 (3.45)	•	o	s	FLX-20G
	184 (697)	50 (3.45)				TFLX-20G (TIP)

* In water setting