

HANDLINE NOZZLES




SELECT-O-FLOW®

Select-O-Flow®

Select-O-Flow®, the original selectable gallonage nozzle, is similar in function to the Phantom® — allowing the firefighter to select the appropriate flow. The Select-O-Flow® range goes as high as 250 gpm.

HANDLINE NOZZLES

1-13

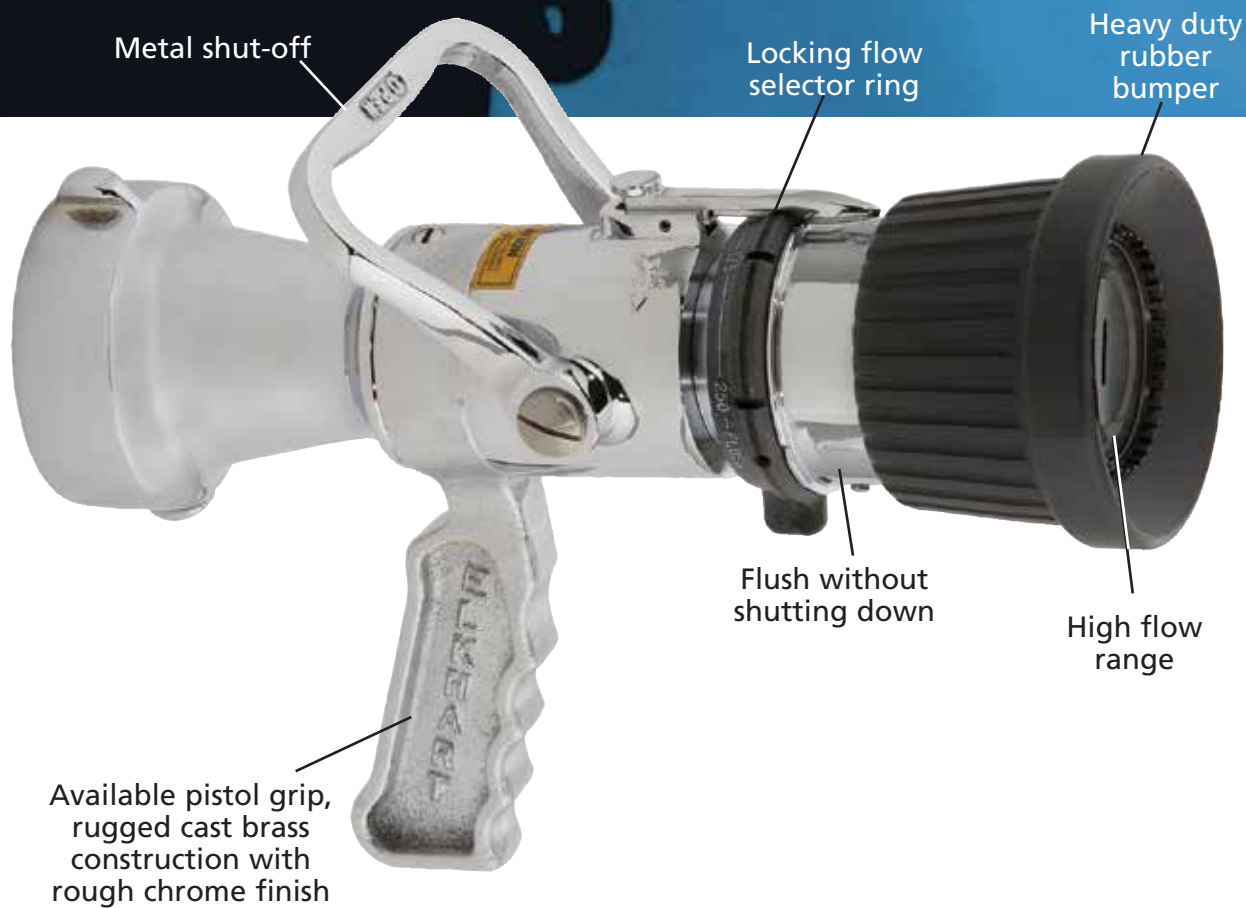

British Standard Parallel Pipe (BSPP) and British Instantaneous (BS336) base options available.

ELKHART BRASS MFG. CO., INC. • 800.346.0250 • 1.574.295.8330 • FAX: 574.293.9914 • www.elkhartbrass.com

Base Size	FLOW RATE	BREAK-APART COMPONENTS		GRIP			SHUT-OFF		HANDLE		BASE			TEETH			DIMENSIONS		MODEL	FIGURE
	GPM (LPM)	Tip	Shut-Off*	Pistol Grip	Playpipe	Ladderhook	Twist	Ball	Tab	Horseshoe	Rigid	Swivel	Free Swivel	Molded Urethane	Spinning	Rigid Metal	Length (Inches)	Weight (Lbs.)		
	PSI (BAR) 100 (6.89)																			
1.5"	40/60/95/125 (151/227/360/473)							•	o	s		s	o	o	s		7.625	7.75	SFL-B (Brass)	4
				•				•	o	s		s	o	s	o	s	8.375	9.625	SFL-BG (Brass)	1
								•		s	o	s	o		s		7.00	3.75	SFL-O	4
				•				•		s	o	o	s		s		10.00	4.875	SFL-OG	1
							•				s		s		s		6.50	2.75	TSFL-O (Tip Only)	2
	125/175/250 (473/662/946)						•					s			s		7.00	5.50	TSF (Tip Only)	2
								•		s	o	s	o		s		8.00	8.00	SF	4
				•				•		s	o	o	s		s		11.25	8.875	SF-G	1
2.5"	125/175/250 (473/662/946)			•				•		s	o	s	o		s		10.75	10.00	DSF	4
				•				•		s	o	o	s		s		13.875	10.875	DSF-G	1
		TSF	DB-275A					•		s	o	s	o		s		13.00	11.125	STDSF	
		SF	279-L		•	•		•		s	o	o	s		s		18.75	20.75	SF-800	3
		TSF	B-278-L		•	•		•		s	o	o	s		s		17.25	11.50	STSFB-800A	3

Key s = standard o = option

*Break-apart nozzles list standard configurations for shut-offs.

SELECT-O-FLOW® CONFIGURATIONS

Figure 1	PISTOL GRIP	Figure 3	PLAYPIPE
			
Figure 2	TIP ONLY	Figure 4	NOZZLE
			

Fig. 1

Fig. 3

Fig. 2

Fig. 4

OPTIONS

HANDLES

TAB



HORSESHOE



- SFL-B, SFL-BG, SFL-O, SFL-OG all feature aluminum/bronze shut-off handles
- DSF, DSFG, SF, SF-G, STDSF, SF-800 all feature manganese/bronze shut-off handles

MOLDED URETHANE TEETH



THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.

BREAK-APART COMPONENTS

Ball shut-offs and/or playpipes referenced here may be found on page 1-24.

Figures depict general product types only and are not intended to be inclusive of all product features.