


BRITANNIA

Premier CO2 Extinguisher

BC5 – Carbon Dioxide



Carbon Dioxide is tested on class B (flammable liquid) fires and is used as a clean extinguishing agent on small fires.

Features

- ❖ Approved and certified to BS EN3
- ❖ Kite-marked product
- ❖ CE-marked in accordance with the PED
- ❖ Colour coded headcap
- ❖ Safe and reliable
- ❖ Quality assured for long service life
- ❖ Steel body
- ❖ Manufactured in Great Britain



Technical Specification

Model	Capacity (Kg)	Fire Rating	Full Weight (Kgs)	Temp Range	Operating Pressure (Bar) @ 20°C	Discharge Duration (Secs)	Discharge Range (M)	Diameter (mm)	Height (mm)
BC5	5	70B	12.8	-20° to + 60°C	50	15	3	140	705

Britannia Fire reserve the right to alter the specification of the product without prior notice




Tel +44 (0)1508 488416
www.Britannia-Fire.co.uk

ADDITIONAL SPECIFICATIONS

Operating Pressure @ 20°C	50bar
Test Pressure (PT)	250bar
Maximum Allowable Pressure (PS)	169.3bar
Cylinder material	Chromium molybdenum alloy steel
Operating Valve material	Brass
Horn material	Polypropylene
Hose material	EPDM Synthetic rubber
Finish	Polyester Powder Paint

COMPONENT PARTS

ITEM	DESCRIPTION	PART No.
A	Hose and Horn	BC030
B	Brass Tapered Valve	VLV0010
C	5g Steel CO2 Cylinder	CYL0060
D	Syphon Tube	TUBE0172
-	Pull Tight Seal (not shown)	BRH0175
-	Wall Bracket (not shown)	BRH0550

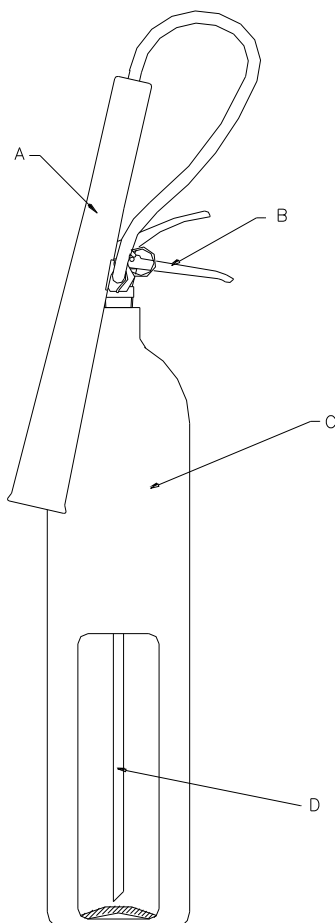

LICENCE NO. KM 6832



0086



Britannia Fire Ltd